




# BW DVR - L/TOWER

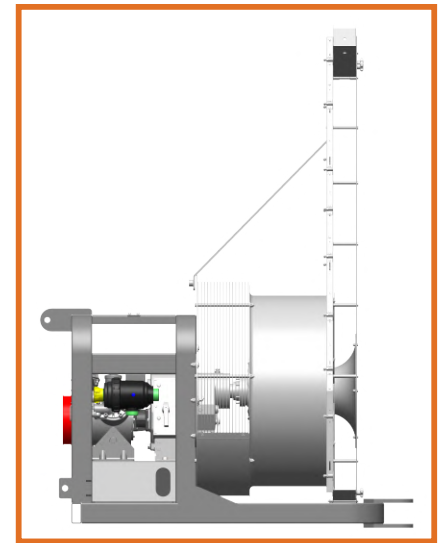

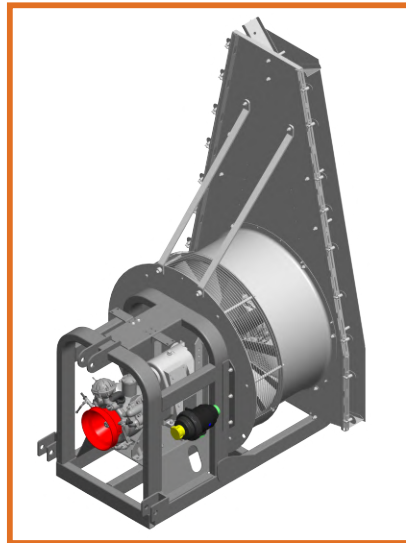

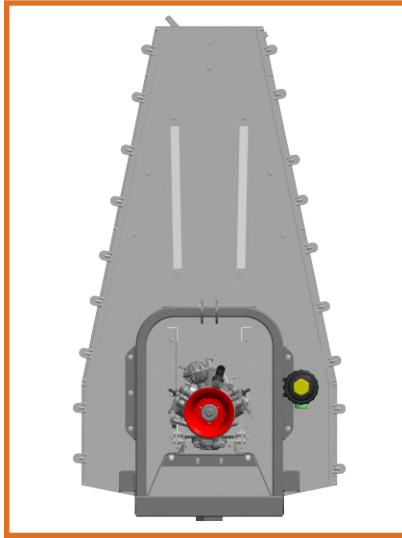


Mounted opposite counter - rotating fan for trailed tank



🇬🇧 The mounted fan BW-PN DVR - L/TOWER is a model provided with two rotating propellers and opposite suction system, specialized in particular for the spraying of espallier intensive orchards. Thanks to its ventilation system you can obtain a spraying uniformity equal to 100% on both sides, as it has high performance and low power absorption, more over, the new generation spraying nozzles with a low environmental impact allow to regulate perfectly the consumption of the nozzles from minimum 200 lt/ha to maximum 900lt/ha, working at low operating pressures and achieving a perfect spraying result and high efficiency

## STANDARD EQUIPMENT

- Air fan with two counterrotating nylon fans, at double speed. In model Ø900 mm fans are equipped with clutch linings
- Nozzle - Holder arches in stainless steel with n.20 Brass anti-drip triple nozzles with cannon K75, ALBUZ 60° ORANGE, ALBUZ 60° RED
- Hot Galvanized Reinforced Chassis
- Elettric Remote Command Unit ARAG model GR881 from tractor with pressure regulator ECC
- Stainless Stell Counter-Rotating Fan Unit (Ø900 DVR L-TOWER) with adjustable upper and lower deflector
- ANNOVI REVERBERI brass pump model BHS 150
- Connection pipes kit to the trailed Tank
- Back Trailer Hitch with connection plug to the hook the sprayer, exhaust valves for the whole system to drain the water from the circuit
- Machine is supplied with drive shaft model T50/900
- In-line brass filter model M146

MODELLO MODEL MODÈLE					 mt	M <sup>3</sup> /Hr	 Modello Model Modèle	 L/Min	
BW - DVR 900 L/TOWER	900 mm	9+9	20	2	8,0 - 11,0 mt	50000 - 60000 m3/hr	BHS150	150 L/Min	90/100 hp

— Ø900 L/TOWER —